



DOW FILMTEC™ Membranes

Features

DOW FILMTEC™ residential elements are the most reliable, consistent and highest quality in the industry. Our elements offer the best balance of flow and rejection, producing industry leading flow rates (around 20% higher) than competitive elements at similar pressures.

DOW FILMTEC™ Residential Elements Feature:


- Longer lifetimes that can reduce operating cost for OEM's/brand owners
- NSF safety certification and ability for NSF data transfer reducing certification costs
- Fully-automated manufacturing that ensures consistent and high quality elements
- Dry shipping for convenient handling and longer shelf-life
- High quality elements significantly reduce or eliminate element Quality Control (QC) costs

Product Specifications

Product	Applied Pressure psig (bar)	Permeate Flow Rate gpd (l/h)	Stabilized Salt Rejection (%)
TW30-1812-50	50 (3.4)	50 (7.9)	98
TW30-1812-75	50 (3.4)	75 (12)	98

1. Permeate flow and salt rejection based on the following test conditions: 250 ppm softened tap water, 77°F (25°C), 15% recovery and the specified applied pressure.
2. Minimum salt rejection is 96.0%.
3. Permeate flows for individual elements may vary +/-20%.

Figure 1

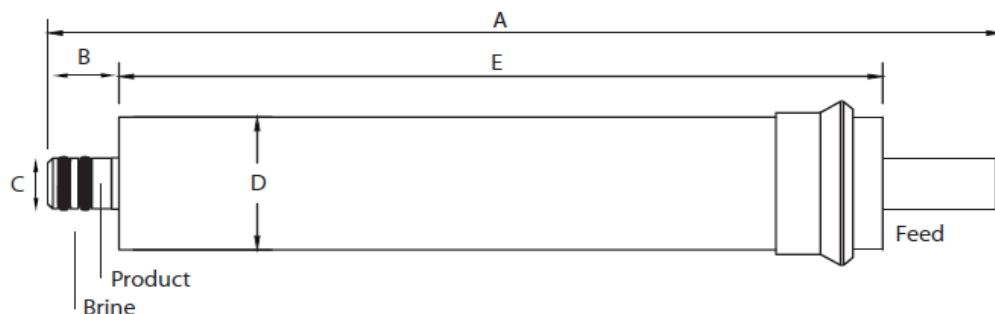

COMPONENT

This component is Tested and Certified by NSF International against NSF/ANSI Standard 58 for material requirements only.

Dimensions – Inches (mm)	A	B	C	D	E
TW30-1812	11.74 (298)	0.875 (22.2)	0.68 (17)	1.75 (44.5)	9.4 (239)

1. TW30-1812 Home Drinking Water elements seal at a standard 2.0 inch – 2.05 inch I.D. within pressure vessels
2. Dow's next generation elements are a fully compatible replacement for existing DOW FILMTEC™ residential RO elements.

Operating Limits

Membrane Type	Polyamide Thin-Film Composite
Maximum Operating Temperature	113° F (45°C)
Maximum Operating Pressure	150 psig (10 bar)
Maximum Feed Flow Rate	2.0 gpm (7.6 lpm)
pH Range, Continuous Operation ^a	2 – 11
Maximum Feed Silt Density Index (SDI)	5
Free Chlorine Tolerance ^b	< 0.1 ppm

a. Maximum temperature for continuous operation above pH 10 is 95°F (35°C).

b. Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, Dow recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to technical bulletin 609-22010 for more information.

DOW FILMTEC™ Membranes

Next Generation of Residential Reverse Osmosis Elements Influence of Temperature and Pressure on TW30-1812 Permeate Flow

Figure 2.
Impact of Pressure on Permeate Flow
(constant temperature, recovery)


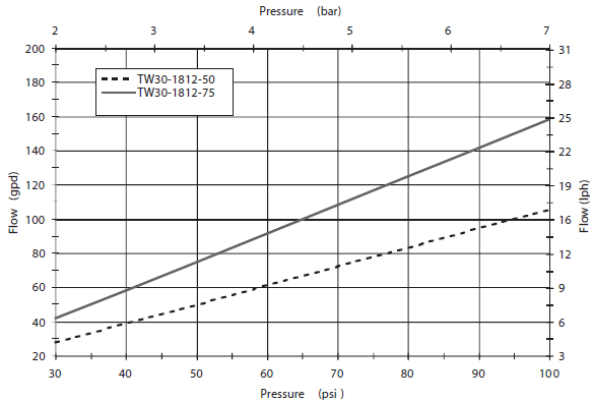


Figure 3.
Impact of Temperature on Permeate Flow
(constant pressure, recovery)

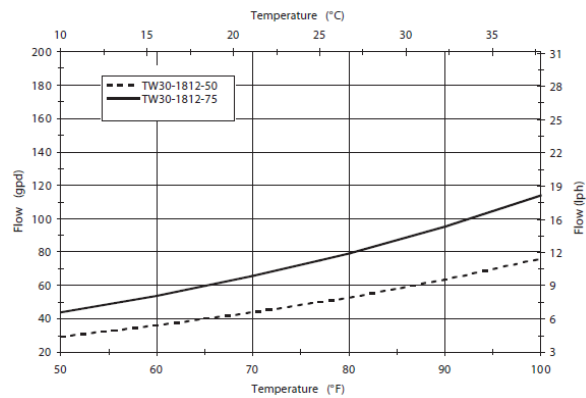

Important Information

- It is recommended that systems using these elements rinse the elements for 24 hours, prior to first use, to meet NSF/ANSI 58 Standard.
- The first full tank of permeate must be discarded. Do not use this initial permeate for drinking water or food preparation.
- Keep elements moist at all times after initial wetting.
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution. Rinse out the preservative before use.
- The membrane shows some resistance to short-term attack by chlorine (hypochlorite). Continuous exposure, however, may damage the membrane and should be avoided.
- DOW FILMTEC™ Home Drinking Water Reverse Osmosis Elements may be covered under the DOW FILMTEC™ Reverse Osmosis and Nanofiltration Element Three-Year Prorated Limited Warranty, 609-35010-1006 extended to OEMs. Such Limited Warranty is non-transferable. Contact a Dow representative for more information.

If operating limits and guidelines given in this Product Information Bulletin are not strictly followed, the Limited Warranty will be null and void. The OEM is fully responsible for the effects of incompatible chemicals and lubricants on elements. Use of any such chemicals or lubricants will void the Limited Warranty.

These membranes may be subject to drinking water application restrictions in some countries: please check the application status before use and sale. These elements have not been through the French approval process for use in potable water.

DOW FILMTEC™ Membranes
For more information about DOW FILMTEC membranes, call the Dow Water & Process Solutions business:
North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: 800 3 694 6367
Italy: 800 783 825
South Africa: 0800 99 5078
Pacific: +800 7776 7776
China: +800 889 0789
India: +91 22 66741500
www.dowwaterandprocess.com

Notice: The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

Notice: No freedom from any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. Dow assumes no obligation or liability for the information in this document. **NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.**

