


WEDECO Quadron™ UV System

RELIABLE UV DISINFECTION FROM EVERY ANGLE

WEDECO
a xylem brand

WEDECO Quadron™ UV System

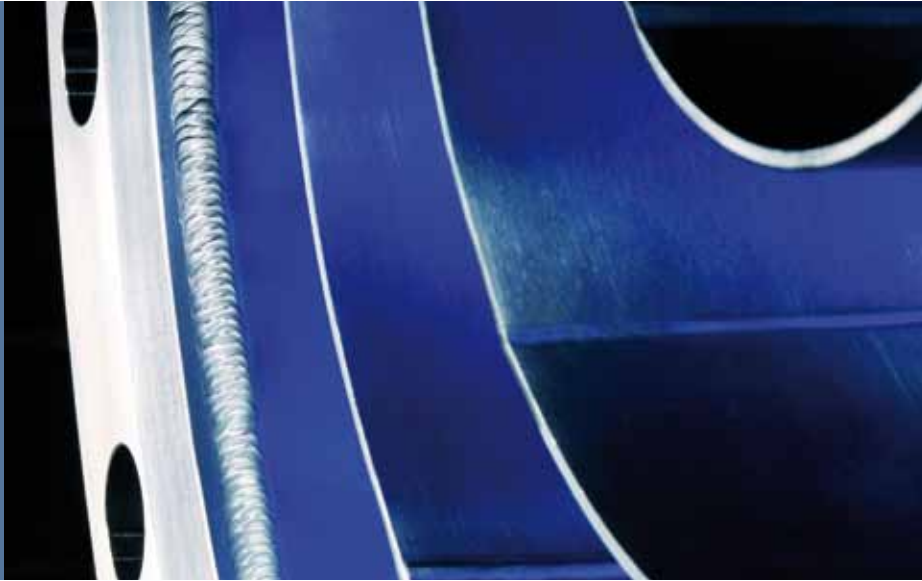


The deactivation of bacteria, viruses and parasites with the help of ultraviolet (UV) light is a tried-and-tested environmentally friendly disinfection method.

The WEDECO Quadron™ system is the ideal solution whenever the space available for installing a UV disinfection system is at a premium. With a reactor length of just 47.24" (1,200 millimeters) and a maximum flowrate of 26 MGD (4,100 m³/h), this UV system offers tremendous flexibility and capability for water treatment plants large and small.

The unique shape, in conjunction with the patented OptiCone™ flow diverter at the inlet, guarantees excellent flow conditions at every installation situation. Even with a close coupled 90 degree bend, the OptiCone™ still ensures even flow distribution without turbulence or cavitation.

Fitted with variable power medium pressure UV lamps, the Quadron™ system is designed for high performance in order to ensure successful disinfection and is ready for every eventuality.

The chemical-free cleaning system and one sensor-per-lamp monitoring system ensure that the correct UV dose is always applied.

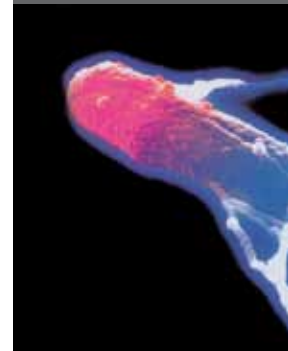



The ultraviolet light changes the hereditary information (DNA) of the germs and thereby prevents further cell division. More than 99.99% of all pathogens can thus be rendered harmless in a matter of seconds.

Better Safe than Sorry

The safest choice in the medium pressure range

During the validation of the WEDECO Quadron™ system in accordance with the US Environmental Protection Agency's UV Disinfection Guidance Manual (UVDGM), not only different quartz sleeves materials have been tested but also other influencing factors, such as the spectral absorption of the water (between 200 and 320 nm).

As a result of the extensive validation testing conducted for the Quadron™ unit, it is a safe design for a medium pressure drinking water system with due consideration of all influencing parameters.

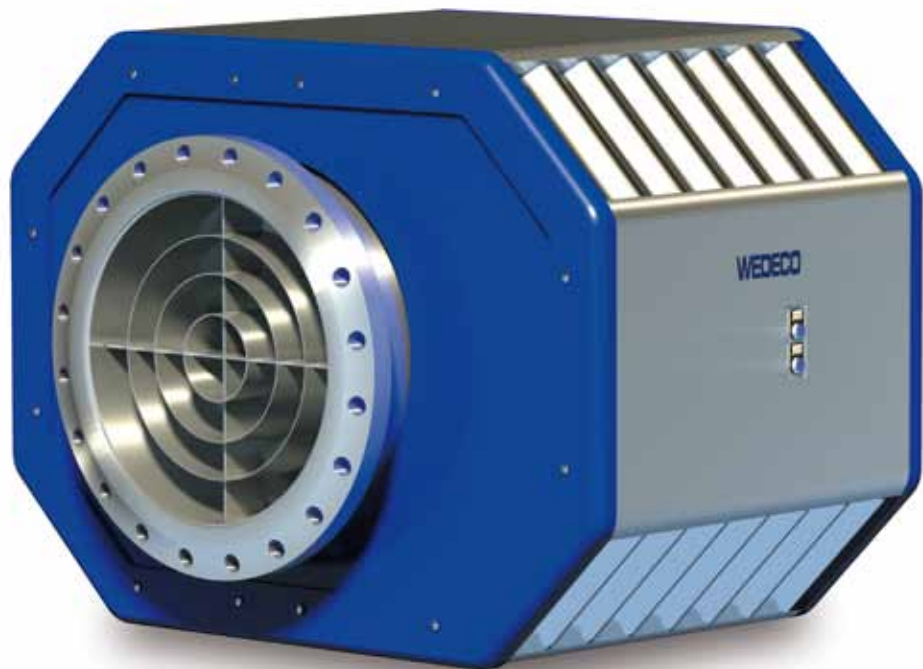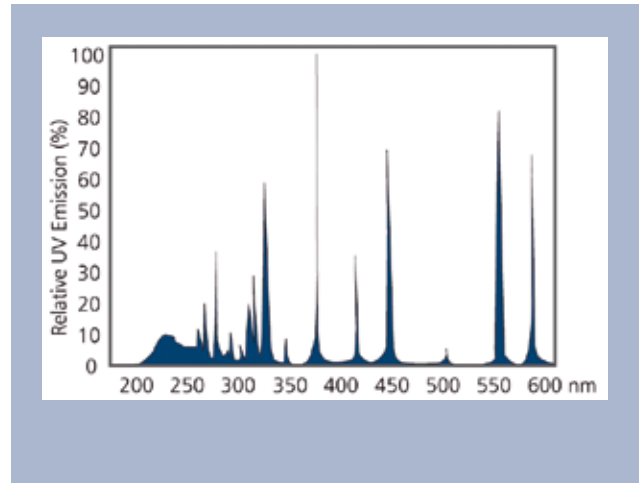

Thanks to its compact dimensions, high UV performance and optimized flow conditions, the WEDECO Quadron system is the ideal alternative to chlorination systems or outdated UV systems.

Efficient Disinfection, Through Superior Design



From the bend to the straight

The patented OptiCone™ flow diverter is the result of intensive development work using complex Computational Fluid Dynamics (CFD) simulations. Using its three guide pipes, the diverter channels the flow for optimum distribution across the lamps. Even with 90 degree feeds, the OptiCone™ still achieves even flow distribution without turbulence or cavitation.


Field bus reduces installation effort

A compact junction box is used to gather all sensor signals, and field bus technology is used to transfer these to the control cabinet. This considerably reduces the wiring work required locally and makes the installation less susceptible to electrical interference signals.

Consistent performance across the entire length

The WEDECO Multiray™ high performance medium pressure UV lamps span the entire radiation chamber, irradiating the complete water column. This ensures even disinfection right into the last corner. Each Multiray™ lamp is monitored by its own US EPA-compliant UV sensor. A chemical-free cleaning system cleans the quartz sleeves and the windows of the sensors automatically, thereby guaranteeing a consistent high level of disinfection.



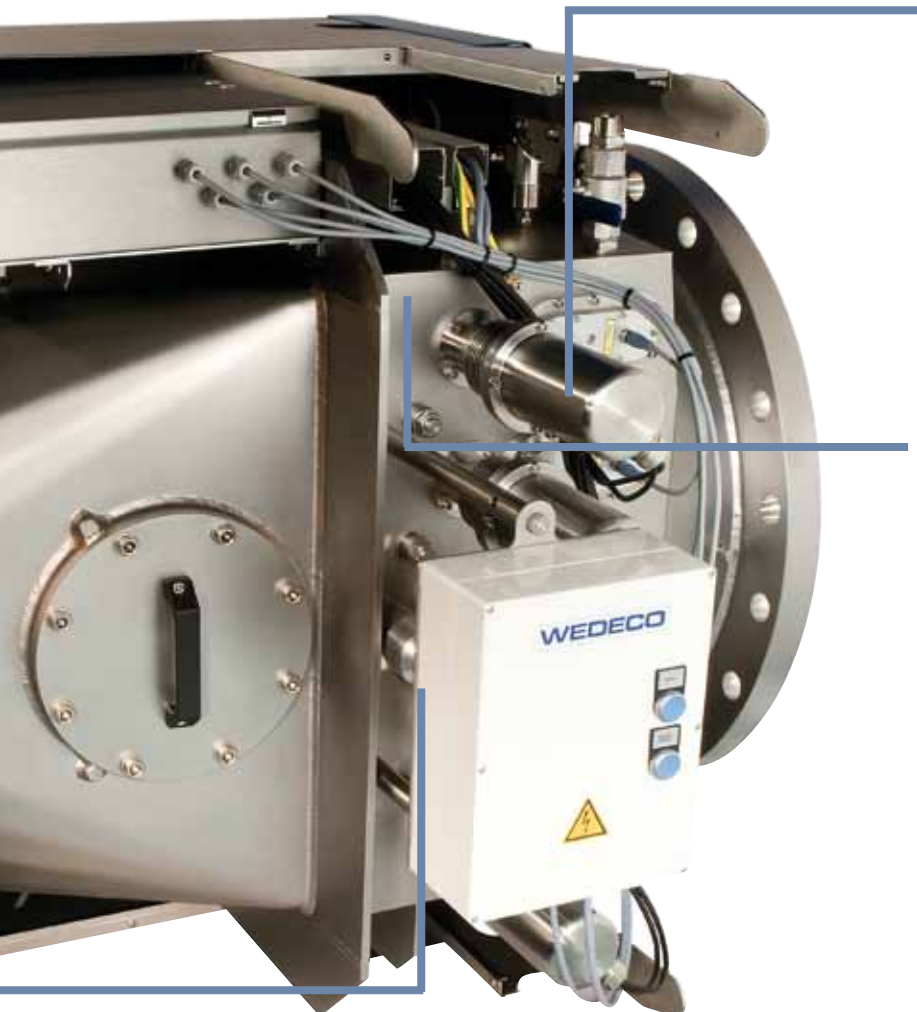

Maintenance made easy

All fittings are easy to access and are arranged along one side to simplify regular maintenance. In addition to UV lamps, it is also possible to replace the sensors quickly and easily without having to empty the radiation chamber. A service hatch enables work to be carried out inside the system. The wiper rings can be changed with ease without requiring tools.

Square design reduces pressure loss


Unlike other medium pressure systems, the square design means that there are no dead zones in the flow. This assures that there is very little head loss and no need for additional pumps either upstream or downstream. Combined with the OptiCone™ the design results in optimal flow distribution.



The electronic ballast is optimized to the UV lamps to create a particularly high level of operational safety and long lamp life.

The output is continuously adjustable from 30-100%, allowing the automatic dose controller of the Quadron™ system to always operate at maximum efficiency. This results in increased UV systems lamp life and minimal power consumption.

Optimal Dimensions for Safe Disinfection

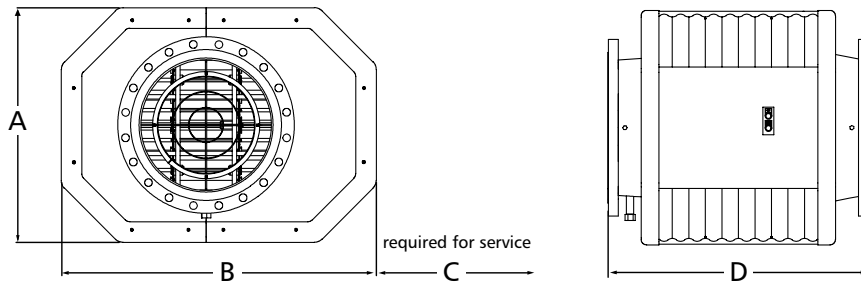

System	
Max. flow capacity	26 MGD (4,100 m ³ /h)
Standards	CE, UL
Certificates & Validations	US EPA (UVDGM)
UV Reactor	
Material	SS 316L, pickled
Flange connections	DN 600 PN 10/ ANSI 24"
Dimensions approx.	42" (A 1078 mm) 57" (B 1448 mm) 47.24" (C 1200 mm) 47.24" (D 1200 mm)
Volume approx.	105.67 gal (400 l)
Total weight, dry approx.	1760 lbs (800 kg)
Operating pressure, max.	145 psi (10 bar)
Mounting	horizontally or vertically
Reactor case	optional
Flow diverter	yes
Automatic wiping system	yes
UV Lamps	
Type	WEDECO Multiray™ Lamp
Quantity	5
Dose pacing (PLC controlled)	30-100%
Calibrated UV Monitoring System	
UV sensor	Germicidal acc. to US EPA requirements
Standard output signal	0/4 - 20 mA
UV Sensor Quantity	5
Electrical Cabinet	
Type	Painted sheet steel enclosure, stand-alone
Weight approx.	1650 lbs (750 kg)
Power supply	400-480 V / 50 - 60 Hz (TN-net)
Dimensions approx.	6' x 7' x 2' (1800 x 2100 x 600 mm)
Mains terminals	3ph, PE

Engineering & Expertise

Our broad knowledge and unrivalled expertise in the field of disinfection along with our full range of highly-developed UV systems make WEDECO a reliable partner for the application of UV technology in the treatment of drinking water.



spare parts feature high quality standards and guarantee you excellent disinfection performance for your systems. The manufacturer, system and process guarantees remain in place, while conformity with regional standards and directives is assured.

Know-how in treatment technology

You can rely on the know-how of our engineers and technicians to help you choose the right system for your needs. All recommendations for the design of your system are based on many years of experience, complex calculation methods, and compliance with local validation and certification standards.

TotalCare Service

Our global network of local service centers and partners offer comprehensive service to support secure, efficient and reliable operation. Our goal is to support our customers by maintaining their systems for the duration of their service life. This is reflected in our solutions, which include proactive maintenance activities, thereby increasing the reliability of your system and optimizing its energy consumption.

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're 12,000 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to www.xyleminc.com

WEDECO



Xylem, Inc.
14125 South Bridge Circle
Charlotte, NC 28273
Tel 704.409.9700
Fax 704.295.9080
www.xyleminc.com

WEDECO is a trademark of Xylem Inc. or one of its subsidiaries.
© 2012 Xylem, Inc. JAN 2012